Addendum #3

Date: November 16, 2026

To: All Project Bidders and Holders of Project

Subject: Addendum #3
H&P Project # 20250492
Route 130 & 210 Water Line
Amherst County, VA

All contractors, subcontractors, suppliers, and vendors submitting Proposals on or related to this project shall incorporate in their proposals all items as described herein, and further, shall acknowledge on the Bid Proposal Form, the receipt of this Addendum.

Item One: Revised Bid Form

1. The revised bid form has been updated and attached to this addendum.
    a. Line item B1, description has changed, this portion of the work can be installed with any of the pipes listed, circle the desired pipe material.
    b. Line item B1.1, description has changed to be 12" HDPE DR11 Pipe (Directional Drill).
    c. Line item B8.1, Rock/Obstruction Encountered (Directional Drill)
    d. Line item A14.1, Rock/Obstruction Encountered (Jack & Bore)
    e. Line item A1, quantity has been adjusted to compensate for line item A1.1.
    f. Line item A1.1, 12" Pipe (Jack & Bore)

Item Two: Plan Updates

2. Plan sheets C-101 & C-102 for Contract B have been updated to reflect the bid form changes regarding pipe descriptions for the portion of the work to be directionally drilled and the remaining pipe can be installed either directionally drilled (DR 11) or open excavation (DI or C900).

Item Three: Questions

3. Can you explain a little more on what "no federal reporting requirements on the project" means? Still buy American? Davis Bacon wages?
    a. There will be no federal reporting requirements on this project. There will be **NO** BABA, Davis Bacon, MBE/WBE, AIS requirements on these projects, as these projects are not using federal funds.

4. Consider amending the bid form to provide separate pay items if rock is encountered during jack and bore or horizontal drilling operations.
    a. Line items A14.1 & B8.1 have been added for any rock/obstruction encounters.

5. Is a staging area required for this project?
    a. No, it is not a requirement, per Addendum #1, the contractor will need to coordinate with ACSA/private property owners if necessary.

Addendum #3

6. Are there any minority or small and/or local business goals affiliated with this contract?
    a. No, there are not MBE/WBE goals for this project, as these projects are not using federal funds.

7. Are there prevailing wages?
    a. No, there are no prevailing wages required on this project, as these projects are not using federals funds.

8. Who will be responsible for road repairs due to pre-existing conditions? For example, if the roadway is susceptible to potholes due to thin asphalt or unsuitable material, will the contractor be compensated for repairs not due to construction?
    a. This is not an anticipated expense and will be addressed/negotiated at that time and will be handled as a change order.

9. If contaminated soil/water is encountered during excavation, how will the contractor be compensated?
    a. This is not an anticipated expense and will be addressed/negotiated at that time and will be handled as a change order.

10. If hazardous materials are encountered during excavation, how will the contractor be compensated?
    a. This is not an anticipated expense and will be addressed/negotiated at that time and will be handled as a change order.

11. Provide an item for 12” Ductile Iron Class 50 pipe installation by jack and bore.
    a. Line item A1.1 has been added for jack & bore installation.

12. If rock excavation is encountered during excavation, how will the contractor be compensated?
    a. Per Addendum #1, rock excavation Line item A14 for Contract A and line item B8 for Contract B.

13. If rock or obstruction is encountered during the 12” ductile iron Class 50 pipe installation by jack and bore, how will the contractor be compensated?
    a. Line items A14.1 have been added for any rock/obstruction encounters.

14. If rock or obstruction is encountered during the directional drill 12” HDPE pipe installation, how will the contractor be compensated?
    a. Line items B8.1 have been added for any rock/obstruction encounters.

15. Is a field office required for this project?
    a. No, a field office is not required.

16. Per Addendum #1, item 11, are the MWBE forms in the spec to be used?
    a. No, there are no MWBE requirements on this project as these projects are not using federal funds.

Addendum #3

17. Clarify the amount budgeted funding associated with Contract A and the amount associated with Contract B that together compromise the stated total project budget.
    a. The total budget for this project is $1,520,000. Contract A $1,120,000 and Contract B $400,000.

End of Addendum 3

DOCUMENT 00 41 00 - BID FORM

The terms used in this Bid with initial capital letters have the meanings stated in the Instructions to Bidders, the General Conditions, and the Supplementary Conditions.

ARTICLE 1 – OWNER AND BIDDER

1.01 This Bid is submitted to:

Amherst County Service Authority
Timothy Castillo, Executive Director
113 Phelps Road / PO Box 100
Madison Heights, VA 24572

1.02 The undersigned Bidder proposes and agrees, if this Bid is accepted, to enter into an Agreement with Owner in the form included in the Bidding Documents to perform all Work as specified or indicated in the Bidding Documents for the prices and within the times indicated in this Bid and in accordance with the other terms and conditions of the Bidding Documents.

ARTICLE 2 – ATTACHMENTS TO THIS BID

2.01 The following documents are submitted with and made a condition of this Bid:

A. Required Bid security;

B. List of Proposed Subcontractors;

C. List of Proposed Suppliers;

D. Evidence of authority to do business in the state of the Project; or a written covenant to obtain such authority within the time for acceptance of Bids;

E. Contractor's license number as evidence of Bidder's State Contractor's License or a covenant by Bidder to obtain said license within the time for acceptance of Bids;

F. Required Bidder Qualification Statement with supporting data;

G. If Bid amount exceeds $10,000, signed Compliance Statement (RD 400-6). Refer to specific equal opportunity requirements set forth in the Supplementary Conditions of the Construction Contract (EJCDC C-800);

H. If Bid amount exceeds $25,000, signed Certification Regarding Debarment, Suspension, Ineligibility and Voluntary Exclusion - Lower Tier Covered Transactions (AD-1048);

I. If Bid amount exceeds $100,000, signed RD Instruction 1940-Q Exhibit A-1, Certification for Contracts, Grants, and Loans.

ARTICLE 3 – BASIS OF BID— UNIT PRICES

3.01 The undersigned Bidder, having carefully examined the Bid Documents and Addenda, all of which are incorporated by reference, agrees to furnish all labor, equipment and services, necessary to complete the construction of the Route 130 & Route 210 Water Line Improvements project with Plans and Specifications dated September 28, 2026 as prepared by Hurt and Proffitt, Inc., Lynchburg, VA, 24501 for the stipulated unit price sum of:

EJCDC® C-410, Bid Form for Construction Contract.
Copyright© 2018 National Society of Professional Engineers, American Council of Engineering Companies, and American Society of Civil Engineers. All rights reserved.

CONTRACT A – BASE BID: ROUTE 130 WATER LINE

ITEM	Description	Quantity	Units	Unit Cost	Cost
Route 130 Water Line					
A1	12" Pipe DI CL 50	2,755	LF		
A1.1	12" Pipe (Jack & Bore)	45	LF		
A2	12" Gate Valve	7	EA		
A3	8" Gate Valve	1	EA		
A4	Air Release	3	EA		
A5	Blow Off	3	EA		
A6	24" Steel Casing	82	LF		
A7	Creek Crossing Abutment	1	LS		
A8	Asphalt Patching	565	SY		
A9	VDOT CG-6	100	LF		
Other					
A10	Clearing & Grubbing	1	LS		
A11	Seeding & Restoration	1	LS		
A12	Silt Fence	2,110	LF		
A13	Blanket Matting	285	SY		
A14	Rock Excavation	100	CY		
A14.1	Rock/Obst. Encountered (Jack & Bore)	20	LF		
A15	Traffic Control	1	LS		
A16	Mobilization (Max 5% of bid)	1	LS		
	Base Bid Total				$
	Contract A – Alternate Bid				
A17	12" Pipe C900 PVC	2,800	LF		
	Alternate Total (Base Bid – Item A1 + Item A17)				$

EJCDC® C-410, Bid Form for Construction Contract.
Copyright© 2018 National Society of Professional Engineers, American Council of Engineering Companies, and American Society of Civil Engineers. All rights reserved.

CONTRACT B - BASE BID: ROUTE 210 WATER LINE

ITEM	Description	Quantity	Units	Unit Cost	Cost
Route 210 Water Line					
B1	12" Pipe (Circle one: DI, C900, or DR11)	430	LF		
B1.1	12" HDPE DR11 Pipe (Directional Drill)	510	LF		
B2	12" Gate Valve	1	EA		
B3	2" Tap (Existing Connection)	1	EA		
B4	Fire Hydrant Assembly	1	EA		
Other					
B5	Clearing & Grubbing	1	LS		
B6	Seeding & Restoration	1	LS		
B7	Silt Fence	100	LF		
B8	Rock Excavation	100	CY		
B8.1	Rock/Obst. Encountered (Directional Drill)	100	LF		
B9	Traffic Control	1	LS		
B10	Mobilization (Max 5% of bid)	1	LS		
	Base Bid Total				$

TOTAL COST OF CONTRACT A BASE BID & CONTRACT B (INCLUDING COST SAVINGS) FOR BEING AWARDED BOTH PROJECTS: ROUTE 130 & 210 WATER LINE

$_____

TOTAL COST OF CONTRACT A (ALTERNATE) & CONTRACT B (INCLUDING COST SAVINGS) FOR BEING AWARDED BOTH PROJECTS: ROUTE 130 & 210 WATER LINE

$_____

3.02 Bidder acknowledges that:

1. The Contractor is responsible for all labor, installation, site restoration and all other materials required to complete the project.
2. Bid Price includes an amount considered by Bidder to be adequate to cover Contractor's overhead and profit.

EJCDC® C-410, Bid Form for Construction Contract.
Copyright© 2018 National Society of Professional Engineers, American Council of Engineering Companies, and American Society of Civil Engineers. All rights reserved.

ARTICLE 4 – DELETED

ARTICLE 5 – DELETED

ARTICLE 6 – TIME OF COMPLETION

6.01 Bidder agrees that the Work will be substantially complete and will be completed and ready for final payment in accordance with Paragraph 15.06 of the General Conditions on or before the dates or within the number of calendar days indicated in the Agreement.

6.02 DELETED.

6.03 DELETED.

6.04 Bidder accepts the provisions of the Agreement as to liquidated damages.

ARTICLE 7 – BIDDER'S ACKNOWLEDGEMENTS: ACCEPTANCE PERIOD, INSTRUCTIONS, AND RECEIPT OF ADDENDA

7.01 *Bid* Acceptance *Period*

A. This Bid will remain subject to acceptance for 60 days after the Bid opening, or for such longer period of time that Bidder may agree to in writing upon request of Owner.

7.02 Instructions *to Bidders*

A. Bidder accepts all of the terms and conditions of the Instructions to Bidders, including without limitation those dealing with the disposition of Bid security.

7.03 Receipt *of Addenda*

A. Bidder hereby acknowledges receipt of the following Addenda:

Addendum Number	Addendum Date

ARTICLE 8 – BIDDER'S REPRESENTATIONS AND CERTIFICATIONS

8.01 *Bidder's Representations*

A. In submitting this Bid, Bidder represents the following:

1. Bidder has examined and carefully studied the Bidding Documents, including Addenda.
2. Bidder has visited the Site, conducted a thorough visual examination of the Site and adjacent areas, and become familiar with the general, local, and Site conditions that may affect cost, progress, and performance of the Work.
3. Bidder is familiar with all Laws and Regulations that may affect cost, progress, and performance of the Work, including all American Iron and Steel requirements.
4. Bidder has carefully studied the reports of explorations and tests of subsurface conditions at or adjacent to the Site and the drawings of physical conditions relating to existing surface or subsurface structures at the Site that have been identified in the Supplementary Conditions, with respect to the Technical Data in such reports and drawings.

EJCDC® C-410, Bid Form for Construction Contract.
Copyright© 2018 National Society of Professional Engineers, American Council of Engineering Companies, and American Society of Civil Engineers. All rights reserved.

5. Bidder has carefully studied the reports and drawings relating to Hazardous Environmental Conditions, if any, at or adjacent to the Site that have been identified in the Supplementary Conditions, with respect to Technical Data in such reports and drawings.

6. Bidder has considered the information known to Bidder itself; information commonly known to contractors doing business in the locality of the Site; information and observations obtained from visits to the Site; the Bidding Documents; and the Technical Data identified in the Supplementary Conditions or by definition, with respect to the effect of such information, observations, and Technical Data on (a) the cost, progress, and performance of the Work; (b) the means, methods, techniques, sequences, and procedures of construction to be employed by Bidder, if selected as Contractor; and (c) Bidder's (Contractor's) safety precautions and programs.

7. Based on the information and observations referred to in the preceding paragraph, Bidder agrees that no further examinations, investigations, explorations, tests, studies, or data are necessary for the performance of the Work at the Contract Price, within the Contract Times, and in accordance with the other terms and conditions of the Contract.

8. Bidder is aware of the general nature of work to be performed by Owner and others at the Site that relates to the Work as indicated in the Bidding Documents.

9. Bidder has given Engineer written notice of all conflicts, errors, ambiguities, or discrepancies that Bidder has discovered in the Bidding Documents, and of discrepancies between Site conditions and the Contract Documents, and the written resolution thereof by Engineer is acceptable to Contractor.

10. The Bidding Documents are generally sufficient to indicate and convey understanding of all terms and conditions for performance and furnishing of the Work.

11. The submission of this Bid constitutes an incontrovertible representation by Bidder that without exception the Bid and all prices in the Bid are premised upon performing and furnishing the Work required by the Bidding Documents

8.02 *Bidder's* Certifications

A. The Bidder certifies the following:

1. This Bid is genuine and not made in the interest of or on behalf of any undisclosed individual or entity and is not submitted in conformity with any collusive agreement or rules of any group, association, organization, or corporation.

2. Bidder has not directly or indirectly induced or solicited any other Bidder to submit a false or sham Bid.

3. Bidder has not solicited or induced any individual or entity to refrain from bidding.

4. Bidder has not engaged in corrupt, fraudulent, collusive, or coercive practices in competing for the Contract. For the purposes of this Paragraph 8.02.A:

a. Corrupt practice means the offering, giving, receiving, or soliciting of anything of value likely to influence the action of a public official in the bidding process.

b. Fraudulent practice means an intentional misrepresentation of facts made (a) to influence the bidding process to the detriment of Owner, (b) to establish bid prices at artificial non-competitive levels, or (c) to deprive Owner of the benefits of free and open competition.

EJCDC® C-410, Bid Form for Construction Contract.
Copyright© 2018 National Society of Professional Engineers, American Council of Engineering Companies, and American Society of Civil Engineers. All rights reserved.

c. Collusive practice means a scheme or arrangement between two or more Bidders, with or without the knowledge of Owner, a purpose of which is to establish bid prices at artificial, non-competitive levels.

d. Coercive practice means harming or threatening to harm, directly or indirectly, persons or their property to influence their participation in the bidding process or affect the execution of the Contract.

EJCDC® C-410, Bid Form for Construction Contract.
Copyright© 2018 National Society of Professional Engineers, American Council of Engineering Companies, and American Society of Civil Engineers. All rights reserved.

ARTICLE 9 – BID SUBMITTAL

BIDDER hereby submits this Bid as set forth above:

Bidder:

_____

(typed or printed name of organization)

By: _____

(individual's signature)

Name: _____

(typed or printed)

Title: _____

(typed or printed)

Date: _____

(typed or printed)

If Bidder is a corporation, a partnership, or a joint venture, attach evidence of authority to sign.

Attest: _____

(individual's signature)

Name: _____

(typed or printed)

Title: _____

(typed or printed)

Date: _____

(typed or printed)

Address for giving notices:

_____

_____

Bidder's Contact:

Name: _____

(typed or printed)

Title: _____

(typed or printed)

Phone: _____

Email: _____

Address:

_____

_____


_____


Bidder's Contractor License No.: (if applicable) _____

END OF DOCUMENT 00 41 00 - BID FORM

EJCDC® C-410, Bid Form for Construction Contract.
Copyright© 2018 National Society of Professional Engineers, American Council of Engineering Companies, and American Society of Civil Engineers. All rights reserved.

*THIS SHEET IS INTENDED TO BE REPRODUCED AT 24"X36". REPRODUCTION OF THIS SHEET AT A DIFFERENT SIZE THAN INTENDED SHALL VOID THE SCALE SHOWN ON THE SHEET.

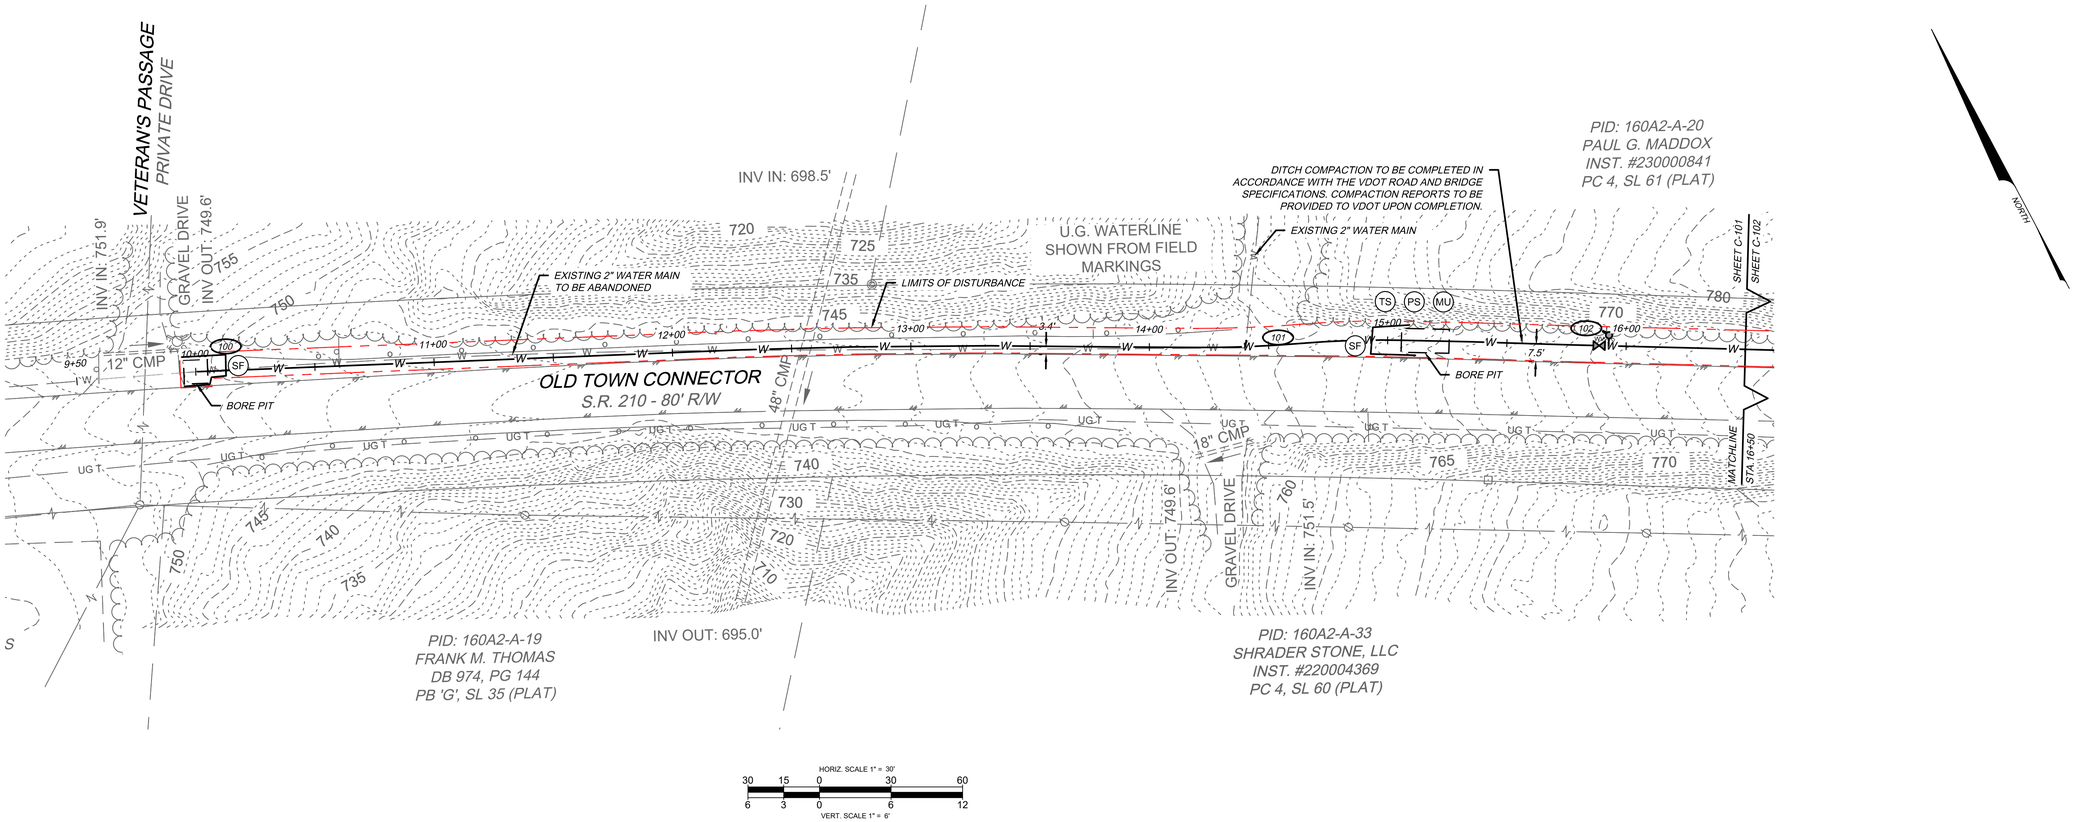

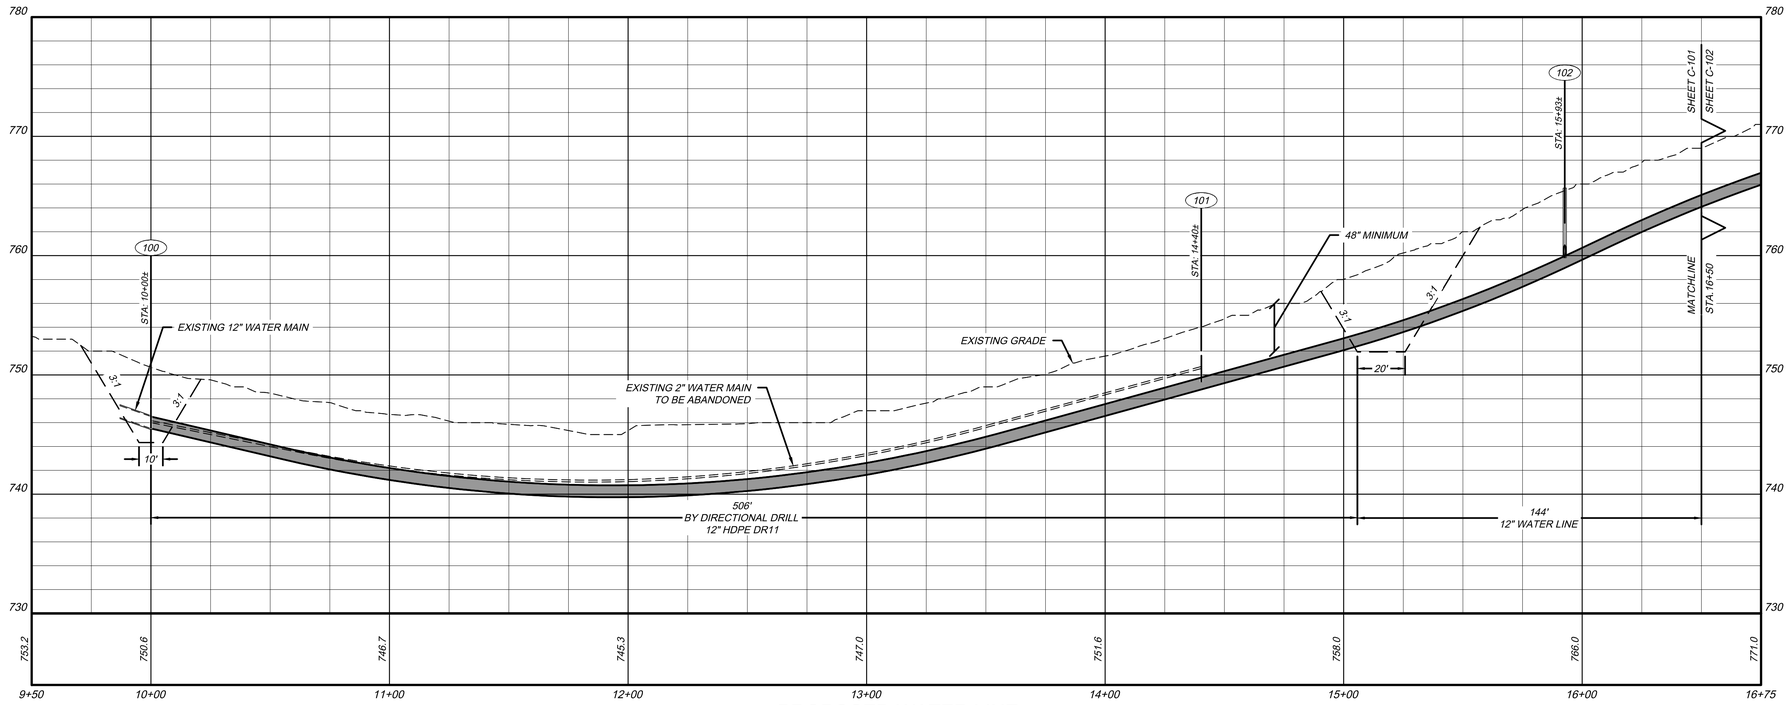

WATERLINE STRUCTURE SCHEDULE

100 — *STA: 10+00±*
REQ'D:
REMOVE FITTINGS FOR EXISTING 2" WATER MAIN
CONNECT TO EXISTING FIRE HYDRANT TEE

101 — *STA: 14+40±*
REQ'D:
(1) 2" TAP - CONNECT TO EXISTING 2" WATER MAIN

102 — *STA: 15+93±*
REQ'D:
(1) FIRE HYDRANT ASSEMBLY (ACSA FH-1)
(1) 12" GATE VALVE AND BOX

3	11/16/2026	ADDENDUM No.3
2	10/14/2026	ADDENDUM No.1
1	06/26/2026	AMHERST COUNTY COMMENTS

HURT&PROFFITT
INSPIRED / RESPONSIVE / TRUSTED
HANDP.COM
LYNCHBURG, VA. 24501
434.847.7796
2524 LANGHORNE ROAD
ENGINEERING - CONSTRUCTION - LAND DEVELOPMENT - ENVIRONMENTAL
GEOTECHNICAL - CONSTRUCTION TESTING & INSPECTION - CULTURAL RESOURCES

PLAN & PROFILE
FOR
ROUTE 210 WATER LINE CONNECTION
AMHERST COUNTY, VIRGINIA

PROJECT NO.	20260468
LAT.	37.425856°
LONG.	-79.130077°
DATE:	05/12/2026
DRAWN BY:	MSF
CHECKED BY:	WCH

COMMONWEALTH OF VIRGINIA
W. CHAD HODGES
Lic. No. 060844
11/16/2026
PROFESSIONAL ENGINEER


APPROVED


HURT&PROFFITT

SHEET NO.	REV.
C-101	----

Nov 16, 2026 - 9:22am Z:\2026\20260468\Engineering\CAD\20260468_PLAN & PROFILE.dwg

*THIS SHEET IS INTENDED TO BE REPRODUCED AT 24"X36". REPRODUCTION OF THIS SHEET AT A DIFFERENT SIZE THAN INTENDED SHALL VOID THE SCALE SHOWN ON THE SHEET.

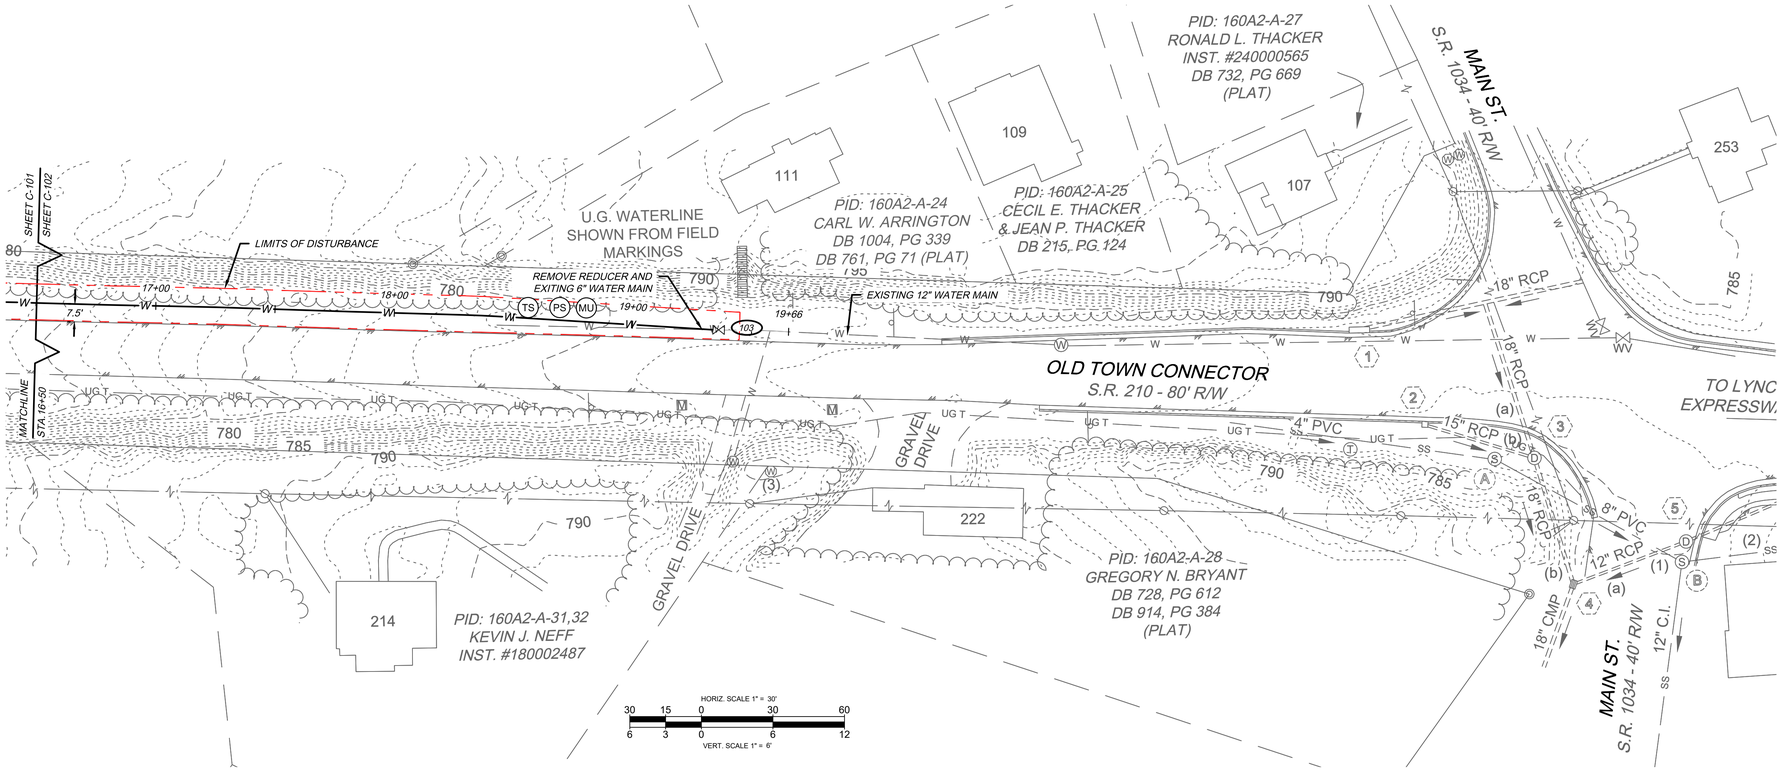

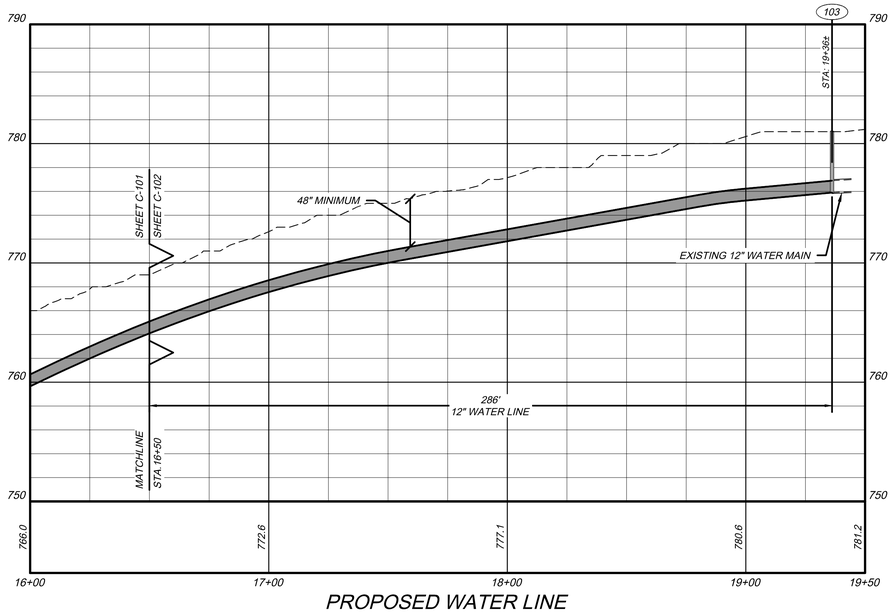

PROPOSED WATER LINE

WATERLINE STRUCTURE SCHEDULE

103 STA: 19+36±
REQ'D:
CONNECT TO EXISTING 12" WATER VALVE

3	11/16/2026	ADDENDUM No.3
2	10/14/2026	ADDENDUM No.1
1	06/26/2026	AMHERST COUNTY COMMENTS

HURT&PROFFITT
INSPIRED / RESPONSIVE / TRUSTED
HANDP.COM
LYNCHBURG, VA. 24501
434.847.7796
2524 LANGHORNE ROAD
ENGINEERING • LAND DEVELOPMENT • ENVIRONMENTAL
GEOTECHNICAL • CONSTRUCTION TESTING & INSPECTION • CULTURAL RESOURCES

PLAN & PROFILE
FOR
ROUTE 210 WATER LINE CONNECTION
AMHERST COUNTY, VIRGINIA

PROJECT NO.	20260468
LAT.	37.425856°
LONG.	-79.130077°
DATE:	05/12/2026
DRAWN BY:	MSF
CHECKED BY:	WCH

COMMONWEALTH OF VIRGINIA
W. CHAD HODGES
Lic. No. 060844
11/16/2026
PROFESSIONAL ENGINEER

APPROVED

HURT&PROFFITT

SHEET NO.	REV.
C-102	----

Nov 16, 2026 - 9:22am - Z:\2026\20260468\Engineering\CAD\260468_PLAN & PROFILE.dwg